


## METAL TREAD BALL CASTERS



For use on carpets. Die cast of strong metal alloy. Rolls quietly and swivels instantly because the pivot point is below the center of gravity. Self-lubricating acetal resin bearings.

1-1/2" wheel. 1.187" swivel radius. 1-3/4" ±1/8" mounting height. 40 lbs. load capacity.

Bright chrome.  
**FLS-PST.15BC**

Windsor antique.  
**FLS-PST.15WA**

Bright brass.  
**FLS-PST.15BB**

2" wheel. 1.645" swivel radius. 2-1/8" ±1/8" mounting height. 75 lbs. load capacity.

Bright brass.  
**FLS-PSE.20BB**

Bright chrome.  
**FLS-PSE.20BC**

Windsor antique.  
**FLS-PSE.20WA**

2-1/2" wheel. 2.063" swivel radius. 3" ±1/8" mounting height. 100 lbs. load capacity.


Bright brass.  
**FLS-PPL.25BB**

Bright chrome.  
**FLS-PPL.25BC**

Bright chrome with brake.  
**FLS-PPL.25BCB**

Windsor antique.  
**FLS-PPL.25WA**

## RUBBER TREAD BALL CASTERS

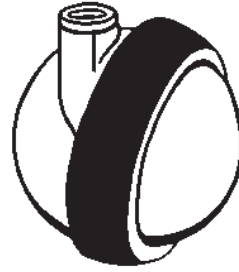

For use on hard floors. Die cast of strong metal alloy. Rolls quietly and swivels instantly because the pivot point is below the center of gravity. Self-lubricating acetal resin bearings. Oil-resistant rubber is permanently bonded to the metal wheel. All moving parts are enclosed and there is no caster flutter.

# shepherd

2-1/4" wheel. 1.745" swivel radius. 2-5/8" ±1/8" mounting height. 75 lbs. load capacity.

Bright brass.  
**FLS-PNA.22BB**

Bright chrome.  
**FLS-PNA.22BC**

Windsor antique.  
**FLS-PNA.22WA**

3" wheel. 2.230" swivel radius. 3-1/4" ±1/8" mounting height. 100 lbs. load capacity.

Bright brass.  
**FLS-PSN.30BB**


Bright brass with brake.  
**FLS-PSN.30BBB**

Bright chrome.  
**FLS-PSN.30BC**

Bright chrome with brake.  
**FLS-PSN.30BCB**

Windsor antique.  
**FLS-PSN.30WA**


## FASTENERS



For **PST** casters:  
Stem **FLS-2955**      Socket **FLS-7227**

For **PSE** and **PNA** casters:  
Stem **FLS-2940**      Socket **FLS-7227**


For **PPL** and **PSN** casters:  
Stem **FLS-2930**      Socket **FLS-7227**

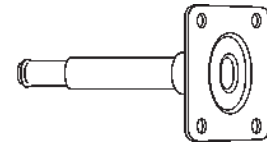

For **PST** casters:  
1-1/16" diameter *round* plate.  
**FLS-2953**


For **PSE** and **PNA** casters:  
1-1/2" x 1-1/2" plate.  
**FLS-2936**

For **PPL** and **PSN** casters:  
1-1/2" X 1-1/2" plate.  
**FLS-2905**



For **PSE** and **PNA** casters:  
5/16" dia. UNC18 x 1/2" threaded stem.  
**FLS-2945**

For **PPL** and **PSN** casters:  
5/16" dia. UNC18 x 1/2" threaded stem.  
**FLS-2921**  
5/16" dia. UNC18 x 1-1/4" threaded stem.  
**FLS-2922**




For **PSE** and **PNA** casters:  
7/16" x 7/8" stem.  
**FLS-88S**  
7/16" x 1-7/16" stem.  
**FLS-4265**

For **PPL** and **PSN** casters:  
3/8" x 1" stem.  
**FLS-5932**  
7/16" x 1-7/16" stem.  
**FLS-7583**

Please note - Some products featured in this catalog may not be stock items. See CabinetWare.com for current stock availability.

**TWIN WHEEL  
CASTERS**

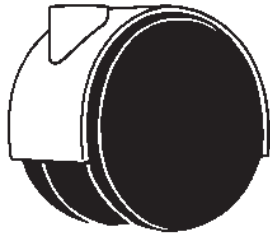

Die cast zinc body. Dual wheels minimize carpet twist. Nylon tread for carpets. Urethane tread for hard floors.

2" wheel. 1.739" swivel radius. 75 pounds load capacity per caster. 2-1/4" ± 1/8" mounting height.

Bright brass. Nylon tread.  
**FLS-PPA.50BB**

Bright chrome. Nylon tread.  
**FLS-PPA.50BC**

Bright chrome. Brake. Nylon.  
**FLS-PPA.50BCB**

Flat black. Nylon tread.  
**FLS-PPA.50FB**

Flat black. Brake. Nylon.  
**FLS-PPA.50FBB**

Flat black. Urethane tread.  
**FLS-PPA.50UFB**

2-3/8" wheel. 2.157" swivel radius. 100 lbs. load capacity per caster. 2-3/4" ± 1/8" mounting height.

Bright brass. Nylon tread.  
**FLS-PPA.60NBB**

Bright chrome. Nylon tread.  
**FLS-PPA.60NBC**

Flat black. Nylon tread.  
**FLS-PPA.60NFB**

Bright brass. Urethane tread.  
**FLS-PPA.60UBB**


Bright chrome. Urethane tread.  
**FLS-PPA.60UBC**

Flat black. Urethane tread.  
**FLS-PPA.60UFB**

CabinetWare


**NOTES**

**FASTENERS**



For **PPA.50** casters:  
Stem **FLS-2940**      Socket **FLS-7227**


For **PPA.60** casters:  
Stem **FLS-2930**      Socket **FLS-7227**

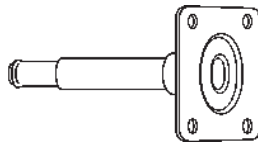

For **PPA.50** casters:  
1-1/2" x 1-1/2" plate.  
**FLS-2936**

For **PPA.60** casters:  
1-1/2" X 1-1/2" plate.  
**FLS-2905**


*shepherd*



For **PPA.50** casters:  
5/16" dia. UNC18 x 1/2" threaded stem.  
**FLS-2945**

For **PPA.60** casters:  
5/16" dia. UNC18 x 1/2" threaded stem.  
**FLS-2921**


5/16" dia. UNC18 x 1-1/4" threaded stem.  
**FLS-2922**



For **PPA.50** casters:  
7/16" x 7/8" stem.  
**FLS-88S**  
7/16" x 1-7/16" stem.  
**FLS-4265**

For **PPA.60** casters:  
3/8" x 1" stem.  
**FLS-5932**  
7/16" x 1-7/16" stem.  
**FLS-7583**


**TWIN WHEEL  
CASTERS**

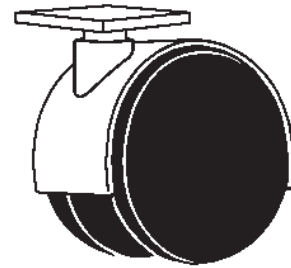

4-1/2" wheel. 3.505" swivel radius. 5" ± 1/8" height. For light industrial use. Ball bearing raceway each wheel. Rubber tread for hard floors.  
**FLS-PTA.45BK**  
**FLS-PTA.45BKB** With brake.

CabinetWare


**HOODED  
CASTERS**

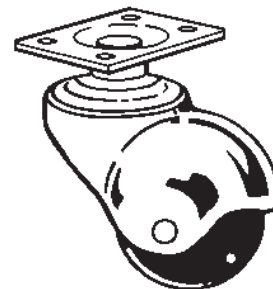

2" rubber ball caster with plate.

Polished Brass  
**FL-CS50PPB**


Polished Chrome  
**FL-CS50PPC**

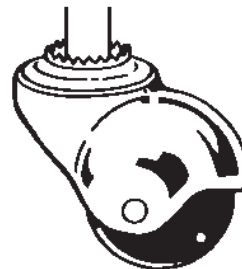

Double race bearing with stem. 2" polyolefin ball. 2-3/8" ± 1/8" mounting height. 80 lbs. max. dynamic load.

Polished Brass  
**FL-CS50SPB**

## INDUSTRIAL RIGID CASTERS

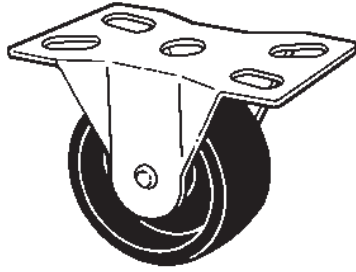

Rubber wheels for quiet movement and maximum floor protection. Corrosion resistant heavy zinc plated. Two swivel casters may be used in combination with two rigid casters for easier steering over long distances. For straight line mobility.

2" wheel. 125 lbs. load capacity. 29/32" tread width. 2 1/2" mounting height. 1 1/2" x 2-21/32" mounting plate with 15/16" x 2-1/8" bolt hole spacing and 17/64" bolt dia.

**FLS-PRR.20ZN**

2 1/2" wheel. 175 lbs. load capacity. 1-7/64" tread width. 3-9/32" mounting height. 2 1/4" x 4-7/16" mounting plate with 1-1/16" x 3 1/2" bolt hole spacing and 21/64" bolt diameter.

**FLS-PRR.25ZN**


3" wheel. 210 lbs. load capacity. 1-9/32" tread width. 3-27/32" mounting height. 2 1/2" x 4-15/16" mounting plate with 1-3/16" x 4" bolt hole spacing and 11/32" bolt diameter.

**FLS-PRR.30ZN**

4" wheel. 255 lbs. load capacity. 1-19/64" tread width. 4-15/16" mounting height. 3-1/8" x 6 1/4" mounting plate with 1 3/4" x 5" bolt hole spacing and 25/64" bolt dia.

**FLS-PRR.40ZN**

## INDUSTRIAL SWIVEL CASTERS

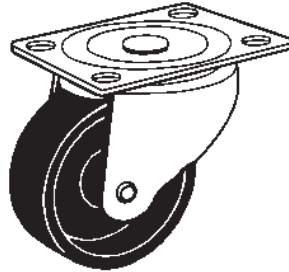

Rubber wheels for quiet movement and maximum floor protection. Corrosion resistant heavy zinc plated.

2" wheel. 125 lbs. load capacity. 29/32" tread width. 2-13/16" mounting height. 1-7/8" x 2-9/16" mounting plate with 15/16" x 2-1/8" bolt hole spacing and 17/64" bolt dia.

**FLS-PSR.20ZN**

2 1/2" wheel. 175 lbs. load capacity. 1-7/64" tread width. 3 1/4" mounting height. 2 3/4" x 3-15/16" mounting plate with 1 3/4" x 3" bolt hole spacing and 21/64" bolt diameter.

**FLS-PSR.25ZN**

2 1/2" wheel with brake.

**FLS-PSR.25ZNB**

3" wheel. 210 lbs. load capacity. 1-9/32" tread width. 3-13/16" mounting height. 3-1/8" x 4-1/8" mounting plate with 2-3/8" x 3-3/8" bolt hole spacing and 11/32" bolt diameter.

**FLS-PSR.30ZN**


4" wheel. 255 lbs. load capacity. 1-19/64" tread width. 5" mounting height. 4" x 5-1/8" mounting plate with 3" x 4" bolt hole spacing and 25/64" bolt diameter.

**FLS-PSR.40ZN**

4" wheel with brake.

**FLS-PSR.40ZNB**

## HOODED CASTER

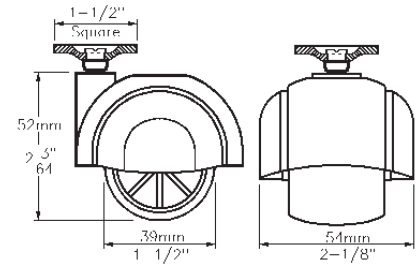


Our lowest priced caster. 50mm nylon wheel. 154 lbs. max. load. Black with plate.

**FL-CS250PBK**

CabinetWare

## SUPER TRI-DOLLY

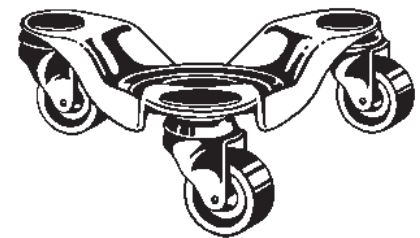

12" diameter with 2" polyolefin wheels. Move heavy objects easily. Can be used as a turn-table when painting. Flat black coated surface scratch resistant. Recessed center hole to hold legs. 200 lbs. load capacity.

**FLS-PSD.20FB**

CabinetWare

## NOTES

---



---



---



---



---



---



---



---



---




---

Please note - Some products featured in this catalog may not be stock items. See CabinetWare.com for current stock availability.




LEG LEVELER

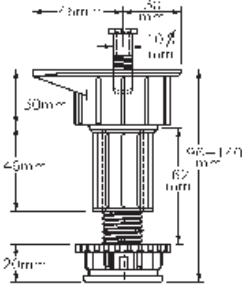


4" pre-set height. Adjustable from 3-3/4" to 5-1/2". Attaches to bottom of cabinet with a 10mm dia. fixing screw mounted through the inside bottom of the cabinet. Black plastic leveler leg and block.

**FLB-69.7200**



Screw on clip and glider. Attaches to the back of the toekick and snaps around the lever leg. Provides alignment of the toekick. Black plastic.

**FLB-602170.7700**



Press in clip and glider. Attaches to the back of the toekick and snaps around the lever leg. Provides alignment of the toekick. Black plastic.


**FLB-602180.7700**



Recessed cover cap. Snap into hole of fixing screw for finished appearance. White.


**FLB-68.8003**

FLOOR LEVELERS



1-1/2" long x 5/16" diameter threaded bolt leveler with 1" hexagonal black plastic glide.


**FL-HL100BLK**



1" long x 5/16" dia. threaded bolt leveler. 1-1/16" dia. clear plastic glide with molded nut for wrench adjustment.

**FL-10405**

TEE NUTS

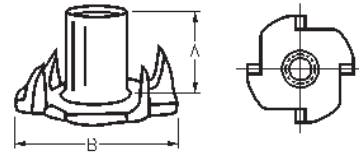


For 5/16" dia. threaded bolt leveler. A=3/8". B=7/8". For use with FL-HL100BLK & FL-10405.

**FL-TN516**

CabinetWare

FLOOR GLIDES



5/8" diameter white plastic flat head nail glide.

**FL-FG58WH**

3/4" diameter white plastic flat head nail glide.

**FL-FG34WH**

CabinetWare

NOTES

---



---



---



---



---



---



---



---



---



---